

# DS-75 Light Commercial Mini Roll-Up Door



Both owners and tenants of mini-storage buildings benefit from the sturdy construction, easy operation and long service life built into DS-75 doors.

DS-75 roll-up doors are available in round or square profiles. The continuous curtains are made from hot-dipped galvanized steel, and then finished with silicone polyester paint for beauty and durability.

Installation to masonry, steel or wood jambs is quick, and simple—no special preparation, no overhead tracks.

Concealed locking slide assembly accepts two shackle locks for equal owner/tenant security. Lockout feature provides owner risk protection.

DS-75 Mini Roll-Up Doors are available in sizes to 10' x 10', and a variety of standard and special colors. You get the doors you need with timely delivery and attractive pricing. Write, call or fax us for specifying and/or ordering information.




- 1 **Corrugated door curtain**, available in round or square profile, is hot-dipped, galvanized 26-Ga. steel, primed then finished with high gloss silicone polyester paint.
- 2 **Polypropylene anti-wear strips** come factory-installed as continuous guides for sliding metal parts, providing quieter operation and longer service life.
- 3 **Tension-Pro® Adjustable Spring Device** allows adjustments to be made to the counterbalance easily and safely.
- 4 **Bottom bar assembly** includes heavy-duty steel angle, roll-formed galvanized steel bottom bar and replaceable blade type vinyl astragal.
- 5 **Curtain lock assembly** esthetically pleasing attaches to the exterior curtain, accepts pad locks or cylinder locks for owner/tenant security. Includes lock-out feature.
- 6 **Roll-up door guides** are 18-Ga. galvanized steel. DS-75 guides install to masonry, steel or wood construction equally well.
- 7 **Automatic door stops** prevent door from rolling up past the header.
- 8 **Oil-tempered steel spring** is engineered to counterbalance different door sizes and weights for smooth, easy operation.
- 9 **Heavy-duty steel axle** supports door curtain and counterbalance system.



**Tension-Pro® Adjustable Spring Device** allows adjustments to be made to the counterbalance easily and safely. No special tools are needed. No pins to align. No risk of tension being released accidentally.  
U.S. Patent #6,527,037

#### 20 Year Warranty Against Chalk and Fade

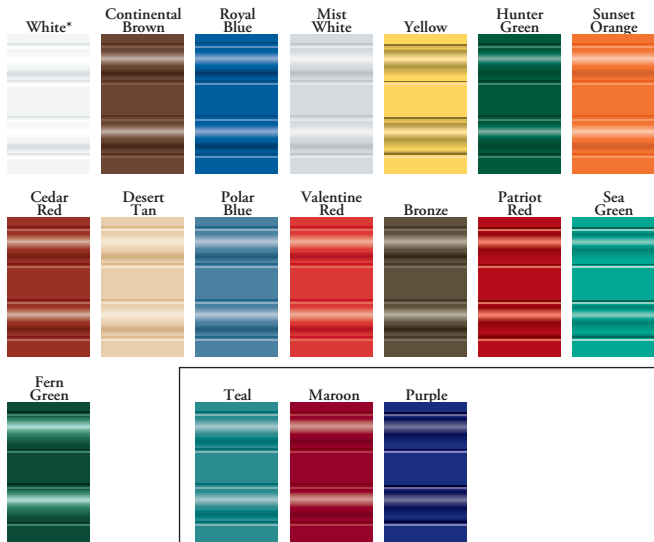

#### 10 Year Warranty Against Chalk and Fade

\* White is also available in a Glossy White finish  
Note: Some colors may have extended lead times. Please consult your local Wayne Dalton dealer for details.



**Standard support brackets** include anti-friction bearings.



**Standard curtain lock** designed for owner/tenant security. Rust resistant.



**Optional Door Insulation** features two layers of aluminum mylar film laminated to two layers of heavy-duty polyethylene air-bubble material. Its "R"-value of 4 helps control heat gain/loss. Includes flexible vinyl top and side draft stops as weather seals between the door and the building.

**Warranty:** Wayne Dalton and its subsidiaries back all of their doors and fittings with a LIMITED WARRANTY against defects in materials and workmanship. Paint has a limited warranty to hold up against weather induced chipping, cracking, and peeling for 25 years. Refer to each color for the number of years warranted not to chalk or change color. A copy of this warranty is available upon request.

Because of continuing product improvements, we reserve the right to change the product specifications and designs without prior notice.

AWS

Absolute Warehouse Services

855.838.9449



www.Wayne-Dalton.com/Commercial

2589 C.R. 168 • Dundee, OH 44624  
Toll-free: 800-795-5095 • Phone: 330-893-3233 • Fax: 330-893-3371

©2013 Wayne Dalton, a division of Overhead Door Corporation.  
Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. Item 279083 03.2012